




Type: **AKSE 450-4 G.4FF A4**  
Installation type 4 direction of airflow V with protection guard  
Part no.: E64-45000



**Curve:**

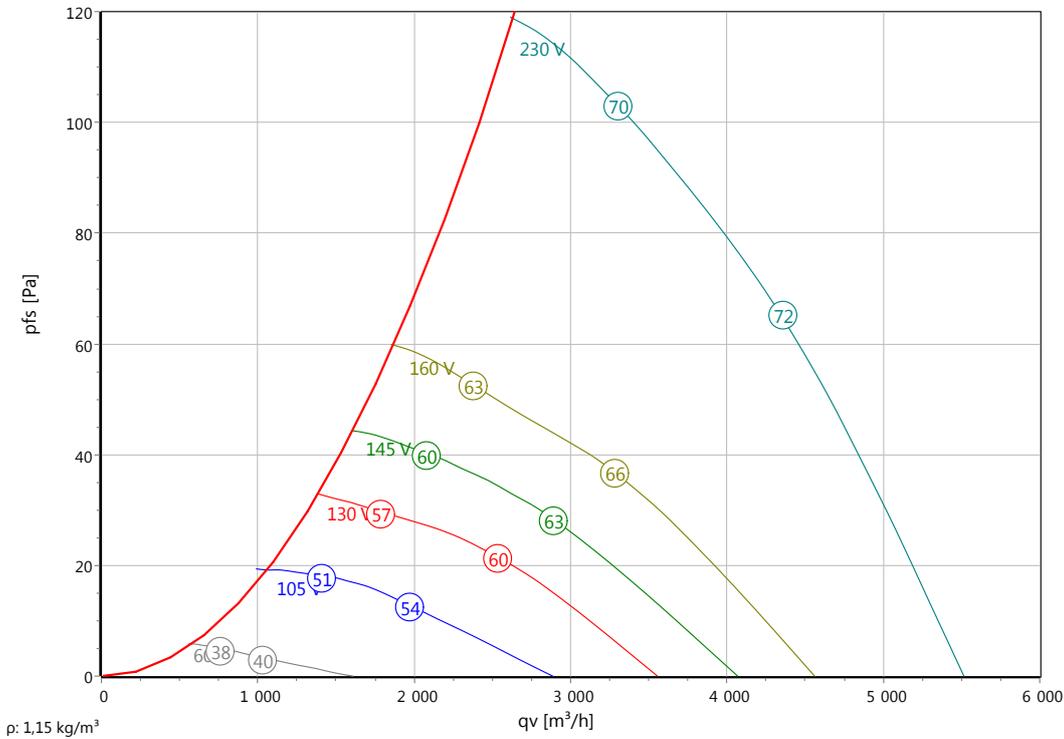

**ErP-Data:**

(EU) Nr. 327/2011 (Lot11)		
Q <sub>v</sub>	3504	m³/h
P <sub>fs</sub>	104	Pa
η <sub>fs</sub>	31,4	%
P <sub>e</sub>	0,32	kW
n	1227	r/min
N	41	N
v	6,083	m/s

**Nominal Data:**

U [V]	f [Hz]	C [μF]	P <sub>e</sub> [kW]	I <sub>N</sub> [A]	n <sub>N</sub> [r/min]	t <sub>R</sub> [°C]	k <sub>10</sub> [m²s/h]	I <sub>A</sub> / I <sub>N</sub>	IP	m [kg]
1~230	50	8	0,34	1,48	1195	-25 .. +40	-	1,6	IP 54	-

ΔI 2 %

**Sound Data:**

Frequency	Σ	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	Distances	1 m	4 m
LwA(A,in) [dB(A)]	-	-19	-11	-9	-6	-5	-7	-19	LpA(A,in) [dB(A)]	-7	-17



Type: **AKSE 450-4 G.4FF A4**  
 Installation type 4 direction of airflow V with protection guard  
 Part no.: E64-45000

