

BLR/VA Vibration Absorber
BLR/VA 避震管




General Description/描述

The vibration clamping bellows are connection tube for vibration resistance, which could be used to prevent tube from cracking due to high frequency vibration.
The vibration damping bellows are used as air suction and exhaust tube of compressor In the freezer, cold store and alt conditioning unit.
BLR/VA 型避震管是用来减震的连接管，可以防止管路因高频震动引起的开裂。
BLR/VA 型避震管用于冷冻、冷藏和空气调节装置的压。

Feature/特点

- ◆Made of full stainless steel bellows.
- ◆Applicable refrigerant:CFC,HCFC and HFC.
- ◆ODS connection and various lengths are available
- ◆Applicable medium temperature:-40 to +150℃.
- ◆采用全不锈钢波纹管制作
- ◆适用于制冷剂:CFC,HCFC and HFC.
- ◆ODS接口，有各种长度的尺寸可提供
- ◆适用介质温度：-40 to +150℃。

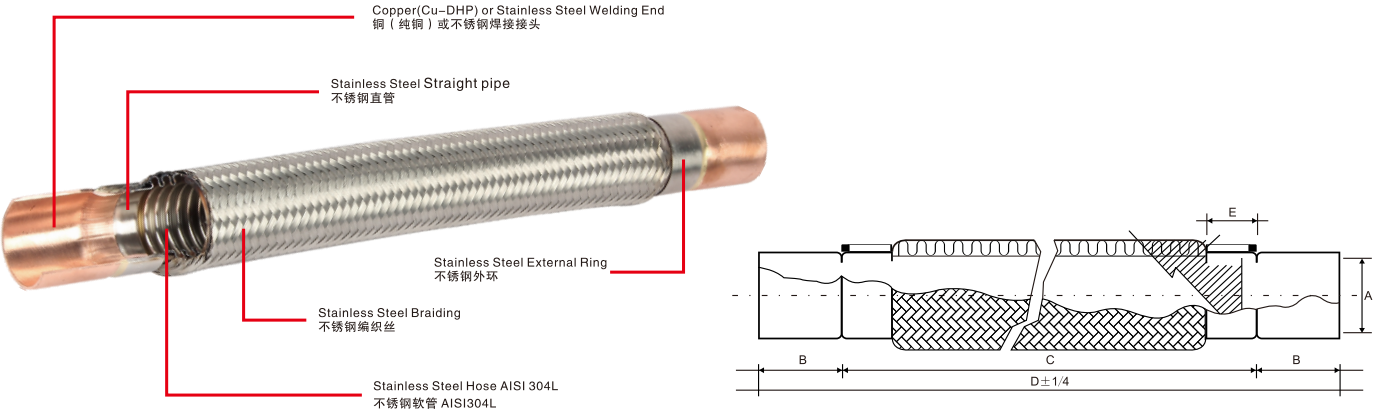

Technical Data/技术参数

Model 型号		Connection 接口		Dimensions(mm) 尺寸(毫米)					M.W.P. Working Pressure 工作压力		Burst Pressure 爆破压力	
		mm	Inch	A (I.D.)	B (±3)	C (±3)	D (±6)	E (±1.5)	Psig	Kgf/m²	Psig	Kgf/m²
BLR/VA-038(m)	BLR/VAS-038(m)	10	3/8	9.62	20	177.5	217.5	13	500	35	2500	50
BLR/VA-012(m)	BLR/VAS-012(m)	12	1/2	12.8	20	188.6	228.6	13	500	35	2500	50
BLR/VA-058(m)	BLR/VAS-058(m)	16	5/8	16.2	22	206.8	250.8	17	500	35	2500	50
BLR/VA-034(m)	BLR/VAS-034(m)	19	3/4	19.2	28	212.3	268.3	17	500	35	25000	50
BLR/VA-078(m)	BLR/VAS-078(m)	22	7/8	22.5	30	244.8	304.8	18	500	35	2500	50
BLR/VA-118(m)	BLR/VAS-118(m)	28	1-1/8	28.8	38	255.3	331.3	20	500	35	2500	50
BLR/VA-138(m)	BLR/VAS-138(m)	35	1-3/8	35.3	40	315	395	22	500	35	2500	50
BLR/VA-158(m)	BLR/VAS-158(m)	41	1-5/8	41.7	50	328.6	428.6	23	500	35	2500	50
BLR/VA-218(m)	BLR/VAS-218(m)	54	2-1/8	54.5	60	403.8	523.8	23	390	30	1950	40
BLR/VA-258(m)	BLR/VAS-258(m)	66	2-5/8	67	76	465.5	617.5	25	340	25	1700	30
BLR/VA-318(m)	BLR/VAS-318(m)	79	3-1/8	79.6	85	514.2	684.2	25	300	20	1500	30
BLR/VA-358(m)	BLR/VAS-358(m)	92	3-5/8	92.5	100	617.5	817.5	25	175	15	525	25
BLR/VA-418(m)	BLR/VAS-418(m)	105	4-1/8	104.9	110	616.6	836.6	25	175	15	525	25

Note: VA means copper connection, VAS means steel connection
注意：VA表示铜接口，VAS表示不锈钢接口