


Model:YWF(K)4D400-ZX32A-B5A

Fan type:AC Axial fan

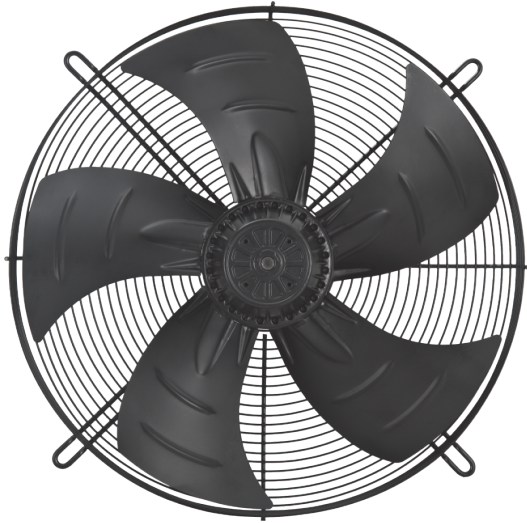

Manufactory:Zhejiang MingZhen Electric & Electronic Co., Ltd.

ADD:The Central Industry Zone, Chengnan Town,
WenLing City, Zhejiang Province, China

TEL:0086-576-86268888

FAX:0086-576-86268020

Mail:info1@cnsanmu.com

WEB:http://www.cnsanmu.com

仅供参考

Fan Introduction

This product consist of outer rotor(AC)motor, axial impeller, with features of compact structure, convenient installation, reliable operation, low noise, energy saving etc..

Scope of application

General purpose fan, can be widely used in purification of air conditioning systems, ventilation duct dust, environmental protection, refrigeration equipment and other fields.

Environmental requirements

- Operating ambient temperature range:-35℃~+70℃
- Working environment humidity range:≤90%
- Transportation and storage temperature range:-40℃~+80℃
- Transportation and storage environment humidity range:≤80%
- The storage place is well ventilated, corrosive gases not contained.

Model:YWF(K)4D400-ZX32A-B5A

Fan type:AC Axial fan

Design, manufacturing, testing standards and certification

- JB-T10562 Technical specification for general purposes axial fans
- GB/T 14711 General safety requirements for Medium and small rotary motor
- GB/T 755/IEC60034-1 rotary motor quota and performance
- GB 4706.32-2012/IEC 60335-2-40:2005 Household and similar electrical appliances - Safety - Part 2-40: Particular requirements for electrical heat pumps, air-conditioners and dehumidifiers
- The level of balance is in accordance with ISO 1940, G6.3
- Vibration testing and velocity is performed according to JB/T8689.
- This product is certified by China CCC and EU CE
- ISO 9001 quality system certification

Technical features

Mass	6.1 kg
Size	φ400 mm
Impeller material	cold rolled sheet steel
Direction	Blow(Seen from cable exit)
Protection class	IP54
Insulation class	F
Mounting	Shaft horizontal or rotor on bottom; rotor on top on request
Mode of operation	S1(Continuous operation)
Bearings	Maintenance-free ball bearings
Thermal protector	Can be built in or out of line according to requirements

Structures

Blades count	5
Impeller type	Large angle welding blade
Attachment	Hight Concave Guard Grille

Technical parameters

Supply	3P,360~440V
Frequency	50 Hz
Motor poles	4


Model:YWF(K)4D400-ZX32A-B5A

Fan type:AC Axial fan


Rated voltage	400 VAC
Power input	270 W
Rated current	0.55 A
Rated speed	1380 r/min
Max airflow	4500 m³/h (Static pressure=0Pa)
Acoustic	68 dB(A) measured at 1.0m from inlet side

Performance curve


Airflow curve

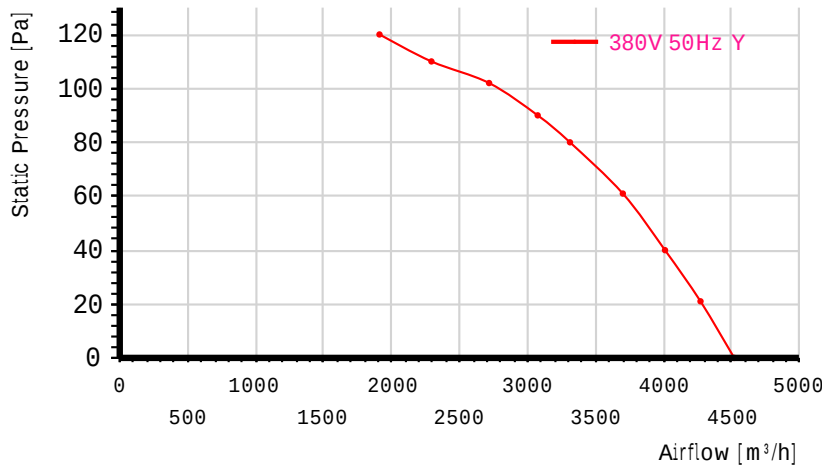

Power input curve



Efficiency on static pressure



Performance test with reference to GB/T 1236-2017, equivalent to ISO 5801


TestID		2016111005			Connection			Y		
Test environment										
Outlet size		Outlet area		Temperature		Humidity		Baropressure		Density
405mm		0.1288m²		18℃		60%		102.1kPa		1.2kg/m³
Test data										
Voltage	Frequency	Speed	Power input	Current	Airflow	Static pressure	Dynamic pressure	Total pressure	Pressure Difference	Nozzle Size
V	Hz	r/min	W	A	m³/h	Pa	Pa	Pa	Pa	mm
381.9	50	1362	289	0.57	1910	120	10	130	226	+189*1
379.9	50	1364	280	0.56	2292	110	15	124	323	+189*1
381.2	50	1367	277	0.56	2716	102	21	122	453	+189*1
380.2	50	1371	273	0.55	3074	90	27	117	219	150+189*1
381	50	1377	263	0.55	3311	80	31	111	254	150+189*1
381.3	50	1386	250	0.53	3700	61	39	100	317	150+189*1
381.1	50	1396	233	0.51	4010	40	46	85	372	150+189*1
380.2	50	1401	223	0.5	4271	21	52	72	422	150+189*1

Model:YWF(K)4D400-ZX32A-B5A


Fan type:AC Axial fan

380.4	50	1410	209	0.49	4520	0	58	58	472	150+189*1
-------	----	------	-----	------	------	---	----	----	-----	-----------

Dimensions(in mm)

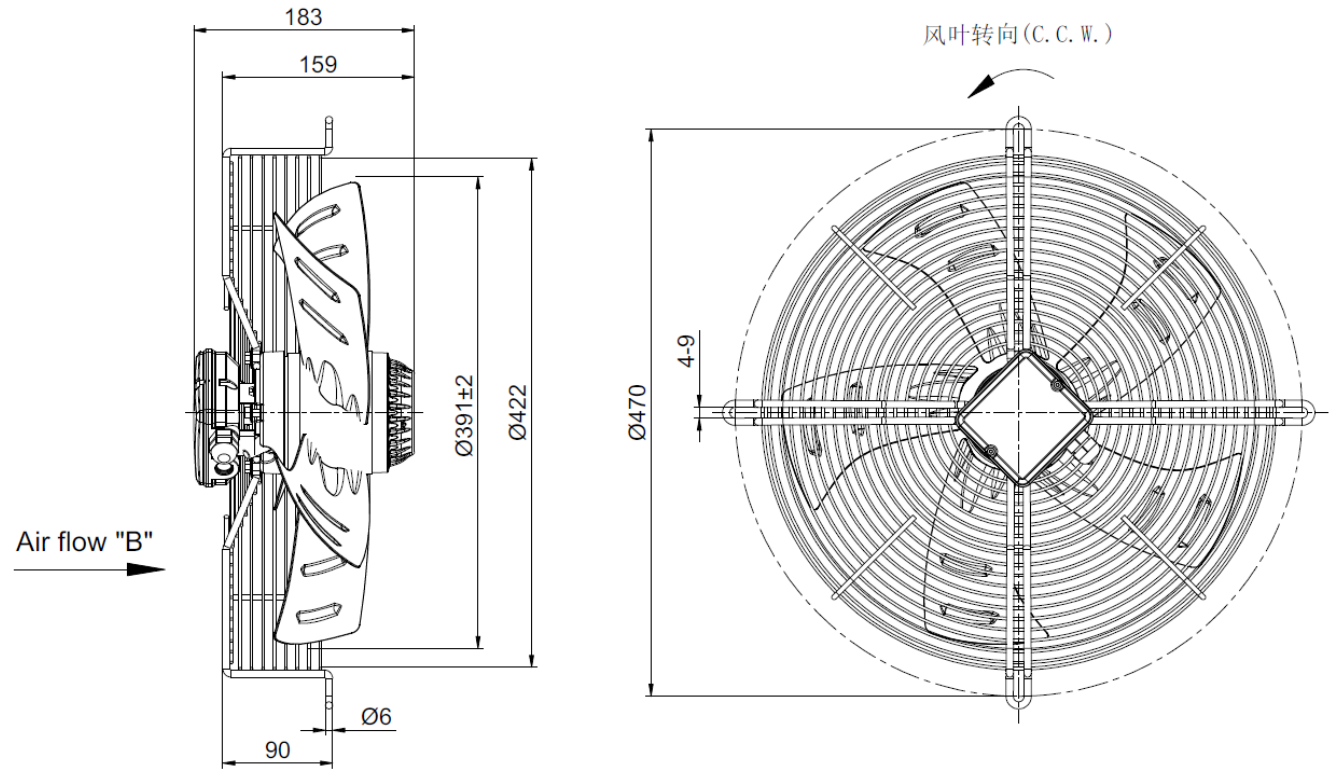

Wiring diagram

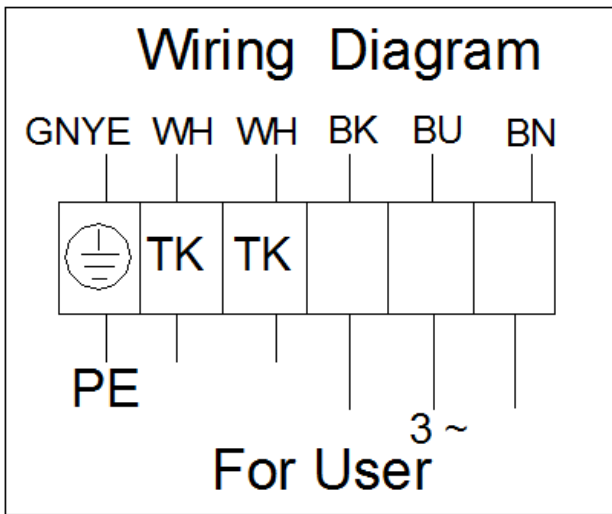

Model:YWF(K)4D400-ZX32A-B5A

Fan type:AC Axial fan

NamePlate

 SANMU [®] AXIAL FAN EAC CE Manufactured for PHS LLC		
Model: YWF(K)4D400-ZX32A-B5A	Voltage: 400V	
Frequency: 50Hz	Current: 0.55A	
Input : 270W	Speed: 1380r/min	
Capacitor: /	CL.F	IP54

Attentions

- ★Please check the appearance and the accessories if there is no damage before use, check the model is consistent with requirements;
- ★Keep reliable grounding according to the wiring diagram. to avoid motor burning and personal accident, please check wiring is loose or fall off;
- ★For AC fans powered by three-phase supply, please confirm the power connection phase sequence before use to ensure that the motor rotation direction is consistent with the marked rotation direction (the motor rotation direction can be changed by reversing any two-phase phase sequence of the power supply);
- ★Before connect the power supply, check whether the motor is reliable, otherwise it will cause motor damage and personal injury;
- ★It is forbidden to pull the power cable, if the power cable is damaged, to be repaired before use, to avoid the accident of electric shock;
- ★Drop or impact motor is forbidden;
- ★Washing motor with water is prohibited, it will reduce the motor insulation level, even lead to electric leakage even endanger personal safety;
- ★Special customized product is designed for specified requirements, please consult with our engineers before change useage;

Model:YWF(K)4D400-ZX32A-B5A

Fan type:AC Axial fan

- ★The temperature of the motor shell may be higher in a short time after the fan stopped, Please avoid direct contact with the motor surface. If necessary, please take protective measures to prevent scald;
- ★Do not contact the impeller when the fan running, you need to wait for all the parts stopped before operate it;
- ★When the fan is installed, check and ensure there is no debris in the shell and other shell body, keep the fan clean;
- ★After the fan installation complete, before connected to supply, please confirm that there is no collision or interference or stuck.

Product life and maintenance, warranty

- The design life of this product is 40,000 hours. This data is derived from the expected life of L10 for general ball bearings at 40℃ is 40,000 hours. The actual service life of the product is affected by the use environment (temperature, humidity, installation, bearing load, etc.).
- According to the use of the environment, please make a clean maintenance every 3~6 months.
- From the date of purchase (order delivery date), The warranty period is one year. During this period, for failure due to the quality of the product itself, we provide free replacement or repairing. If the damage caused by improper disassembly, transportation, artificial damage or natural disasters, etc., is not in the scope of this warranty;