





Performance curve

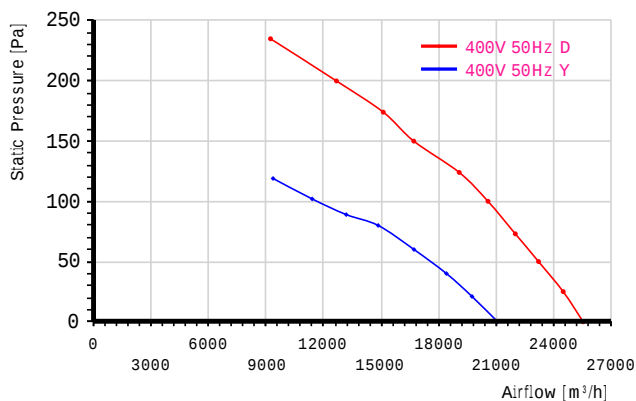


Product Features

- Motor technology: AC
- Supply voltage: 3P, 360~440V
- Supply frequency: 50 Hz
- Rated voltage: 400 VAC
- Power input: 2450/1550 W
- Current: 4.7/2.6 A
- Speed: 870/670 r/min
- Perm. amb. temp: $-35^{\circ}\text{C} \sim +65^{\circ}\text{C}$
- Blades count: 7
- Direction: Blow (Seen from cable exit)
- Protection class: IP54
- Insulation class: F
- Impeller material: cold rolled sheet steel
- Acoustic: 82/75 dB(A)
- Thermal Protector: Can be configured as requirements
- Attachment: Reversed Guard Grille


Power input



Efficiency on Static Pressure



Wiring diagram (Default without thermal protector)

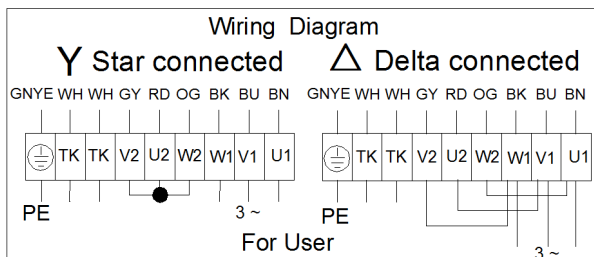

Dimensions mm

